

# Amazon Drop Test Evaluation for Flexible Packages

Date:

Vendor/Seller Name:

ASIN:

Item:

Package Weight (lbs) *cannot exceed 11 lbs:*

Certification (choose only one):

FFP\*

SIOC

Package Dimension (L x W x H inches):

*\*FFP requirements: 100% curbside recyclable packaging, Easy-To-Open, all contents removable within 120 seconds*

Sealing Method:

Heat Seal

Adhesive

Tape

Resealable

Tamper Evident Seal *(required if resealable)*

Slack is less than 2 inches

Exempt from <2inch slack *(rigid and padded mailers)*

No protrusions

Hazard Drop Box\* used

*\*Hazard Drop Box must be 9 x 6 x 3 inches and 3 lbs (or equivalent)*

Material Thickness  $\geq 2$  mils LDPE or minimum tear strength of  $\geq 130$  gram

Seal strength of  $\geq 5.7\text{lb/in}$  (1 N/mm) *(Adhesive Sealing Only)*

No holes larger than 0.25" (6.4mm)


No cosmetic or functional damage to product after testing

## TEST PICTURES

|                |                |                 |
|----------------|----------------|-----------------|
|                |                |                 |
| Pre-test 1-2-5 | Pre-test 3-4-6 | Post-test - BOM |

|                           |                                           |                               |
|---------------------------|-------------------------------------------|-------------------------------|
|                           |                                           |                               |
| Post-test - Photo of item | Post-test - Contents marked as Recyclable | Photo of Hazard Drop Box used |

| Drop Number | Height | Orientation  |
|-------------|--------|--------------|
| 1           | 18 in  | Edge 3-4     |
| 2           | 18 in  | Edge 3-6     |
| 3           | 18 in  | Edge 4-6     |
| 4           | 18 in  | Corner 3-4-6 |
| 5           | 18 in  | Corner 2-3-5 |
| 6           | 18 in  | Edge 2-3     |
| 7           | 18 in  | Edge 1-2     |
| 8           | 36 in  | Face 3       |
| 9           | 18 in  | Face 3       |
| 10          | 18 in  | Edge 3-4     |
| 11          | 18 in  | Edge 3-6     |
| 12          | 18 in  | Edge 1-5     |
| 13          | 18 in  | Corner 3-4-6 |
| 14          | 18 in  | Corner 1-2-6 |
| 15          | 18 in  | Corner 1-4-5 |
| 16          | 36 in  | Face 6       |
| 17          | 18 in  | Face 3       |

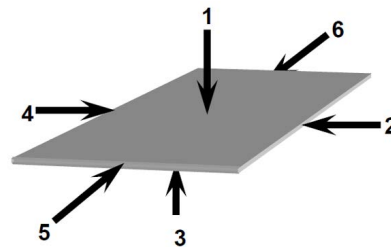

A test from an ISTA certified lab is required if it is categorized as any of the following:

- Fragile
- TV/Monitor
- Contains liquid

**Hazard Box Test:** Drop the Hazard box from a height of 36 inches, and orient it such that the corner impacts the test sample's bag. Repeat the drop twice more. Total number of drops is three.

For more information please visit:

<https://www.aboutamazon.com/packaging>